

# INGENIUM® ZB Smart Socket Adaptor



The INGENIUM® ZB Smart Socket Adaptor is easily controlled with your smartphone/tablet, or through voice commands with Amazon Alexa and Google Assistant. Simply use with a ZigBee compatible hub such as the INGENIUM® ZB, Samsung SmartThings or Amazon Echo devices (Echo Plus/ Echo Show/ Echo Studio).

## Key Features & Benefits

- Connects with INGENIUM® ZB or other major Zigbee compatible systems to add smart control on common electronic devices and small appliances.
- Voice controlled: Works with Amazon Alexa and Google Assistant when combined with INGENIUM® ZB gateway (sold separately). It also can be connected directly to the Amazon Echo Plus/ Echo Show/ Echo Studio.
- Monitor power consumption via INGENIUM® ZB app for energy usage management.
- Energy Efficient: Save energy smartly by scheduling to turn power on/off automatically.
- Remote and local control: Remote control with INGENIUM® ZB app and direct on/off control with the button on the INGENIUM® ZB Smart Socket Adaptor itself.

## Applications

- Residential
- Small business

## Compatibility



## GENERAL INFORMATION


Input Voltage / Frequency	220-240 VAC 50/60Hz
Maximum Load	3000W
Rated Current	13A
Standby Power	< 0.5W
Protocol	Zigbee
Frequency Band	2400 – 2483.5MHz
Operating temperature	0°C—40°C
Operating humidity	≤ 95%RH
Approvals	IEC/EN 62560, IEC/EN 62493, EN 300328, EN 62479 EN 301489-1, EN 301489-17, EN 55015, IEC/EN 61547, IEC/EN 61000-3-2, IEC/EN 61000-3-3

## PRODUCT INFORMATION

Model No.	MM Code	Plug
ZBSA01-UK	406316/ MM08326	UK
ZBSA01-EU	406318/ MM08325	EU

## DIMENSIONS & WEIGHT

Model No.	L mm	W mm	H Mm	Weight g
ZBSA01-UK	62	110	65	135
ZBSA01-EU	62	110	72	130

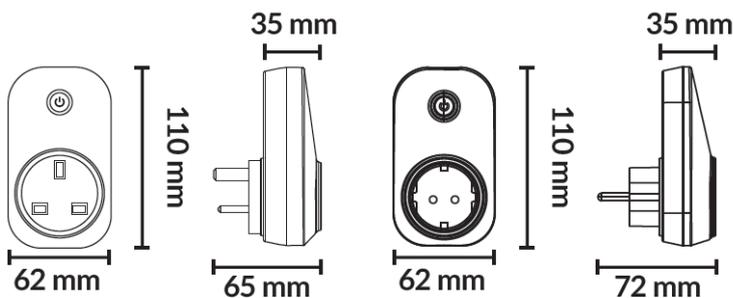

## LOGISTIC INFORMATION

Model No.	Packaging Unit pcs/unit	Outer Box Dimensions			Gross Weight per Outer Box kg
		L mm	W mm	H mm	
ZBSA01-UK	60	427	378	440	15.8
ZBSA01-EU	60	427	378	440	15.2