

BERTO ECO BACKLIT

MEGAMAN®

LD247038-C0900

TECHNICAL DOCUMENT- CONTROL GEAR

Supplier's name or trade mark:	MEGAMAN GmbH
Supplier's address	Halskestraße 22-26, AircomParc A140880 RatingenGermany

Model identifier

Model Number	LD247038-C0900
General description	Input: AC220~240 Output: 33.05W DC900 DC 36mA

Technical Document

Maximum output power	33.05W
Type of light source(s)	LED
Efficiency in full-load	> 88%
No-load power (Pno)	not applicable
Standby Power (Psb)	N/A
Networked Standby Power (Pnet)	N/A
Outer dimensions in mm	
Height	108.5
Width	40
Depth	28
Mass in grams	0
Standards Compliance	EN 61347-1:2015 & EN61347-2-13:2014

Warning

A list of compatible dimmers shall be provided on the website www.megaman.cc

MEGAMAN | WEEE - Green Room | LED, Energy-efficient & Eco-friendly Lighting, Restriction of Hazardous Substance

<https://www.megaman.cc/resources/green-room/weee>

Identification and signature


Model no.: FPL74600v0-ex

Light source model identifier: SPL746v0840


Light source: Removable

I in: 900mA U in 36VDC


1. Confirm the panel is separated with the power, or turn off power at mains supply at first.

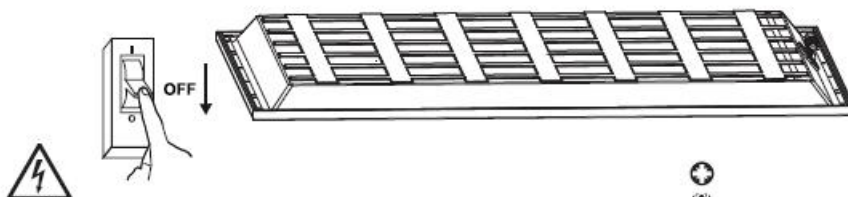

2. Loose all the screws

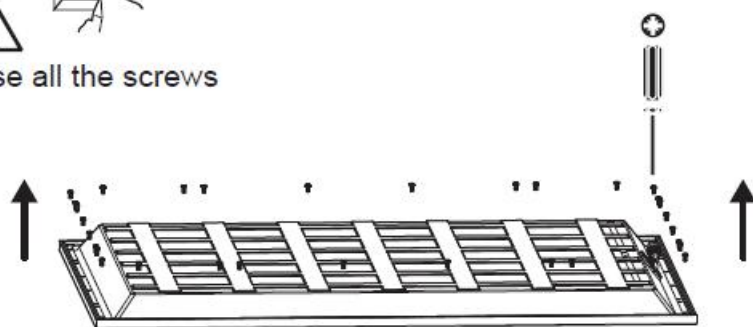

3. Disassemble the panel

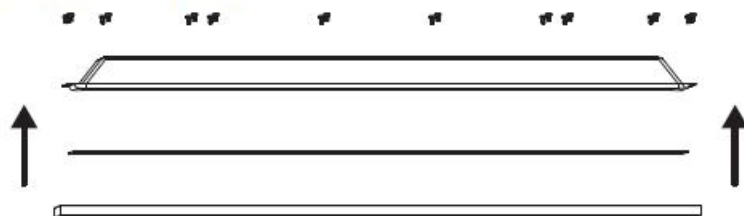

4. Connect the driver and panel leads or other DC supply, turn on the power supply.

