

GDL749v0

TECHNICAL DOCUMENT- CONTROL GEAR

Supplier's name or trade mark:	MEGAMAN GmbH
Supplier's address	Halskestraße 22-26, AircomParc A140880 RatingenGermany

Model identifier

Model Number	GDL749v0
General description	Input: DC 15~19 Output: N/AW DC350 DC 17mA

Technical Document

Maximum output power	N/AW
Type of light source(s)	LED
Efficiency in full-load	N/A
No-load power (Pno)	N/A
Standby Power (Psb)	N/A
Networked Standby Power (Pnet)	N/A
Outer dimensions in mm	
Height	N/A
Width	N/A
Depth	N/A
Mass in grams	N/A
Standards Compliance	N/A

Warning

A list of compatible dimmers shall be provided on the website www.megaman.cc

MEGAMAN | WEEE - Green Room | LED, Energy-efficient & Eco-friendly Lighting, Restriction of Hazardous Substance

<https://www.megaman.cc/resources/green-room/weee>

Identification and signature

Removable Light Source			
Model No.	Light Source Model identifier	Input Voltage (V)	Input Current (mA)
FDM72300v0	SDM723v0830/SDM723v0840	AC220~240	32
FDL74600v0	SDL746v0830/SDL746v0840	AC220~240	43
FDL74700v0	SDL747v0830/SDL747v0840	AC220~240	62
FDL74800v0	SDL748v0830/SDL748v0840	AC220~240	87
FDL74900v0	SDL749v0830/SDL749v0840	AC220~240	104

Step 1: Remove the diffuser




Step 2: Remove the Press button.



Step 3: LOOSEN THE LED MODULE



Step 4: led module

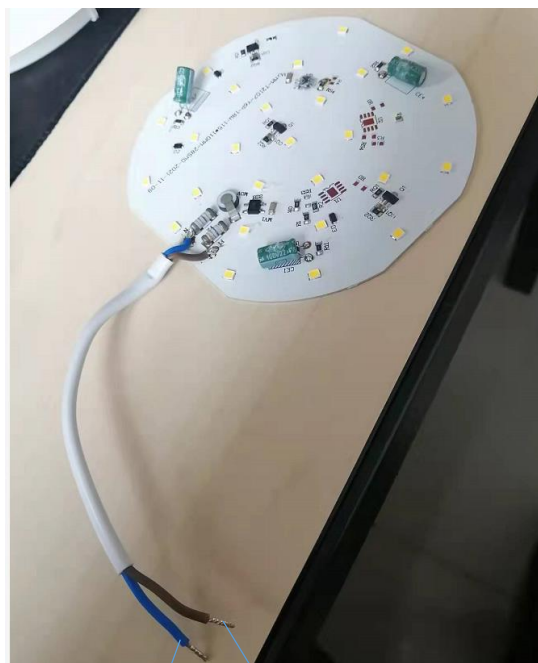

N

L